



2322-J SERIES PROCESS INDUSTRY BIMETAL THERMOMETER MODEL:2322-J



Applications:

2322-J is bimetal thermometer is with all stainless steel construction, which is suitable for corrosive media and environments in chemical process, petroleum and food industry.

Specifications:

Dial size:

4", 6"

Temperature element:

Coiled bimetal

Accuracy class: Cl 1,6

Maximum pressure rating of stem : 25bar

Location of stem: Every angle

Case: 304 stainless steel

Connection: 1/2"BSP stainless

Stem: 6mm diameter, stainless steel,

Dial: Aluminum, white with black writing

Pointer: Aluminum, Black

Window: Instrument Glass

Zero adjustment: Externally at Back of case (applicable for crimped ring)

Ranges: -30+50/-20+60/0-60/0-80/0-120/0-160/0-200/0-250/0-300/0-400/0-500/0-600°C

Options:


NPT thread, 1/4", 3/8" thread

Slide connection, rotating connection

8 or 10mm stem diameter

Liquid dampening

Dimensions:

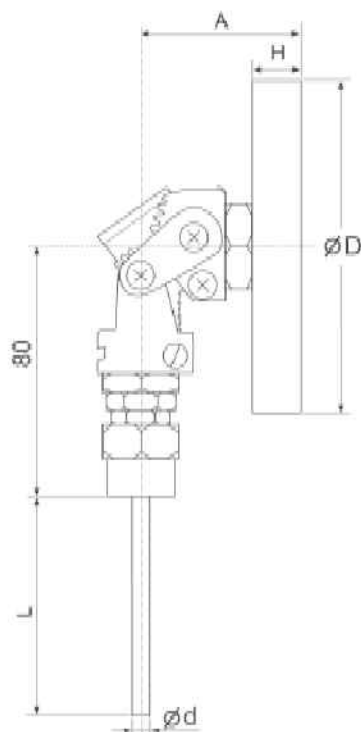

| DIAL SIZE | D | H | A | d | L |
|-----------|------|----|----|------|-----------|
| 4" | Ø111 | 28 | 68 | 8~12 | 1.5"~1.2" |
| 6" | Ø161 | 30 | 68 | 8~12 | 1.5"~1.2" |